



# MODEL NO. 11.3705 LED Light Kit

## GENERAL INFORMATION

Connect LED lights (Model No. 11.2005) to solid-state flasher (Model No. 11.1005SF). After connecting the LED lights to flasher, connect flasher to switch (Model No. 11.1002). Use of an in-line 3 amp fuse is recommended between power source and switches. NOTE: LED lights must be connected to a Flasher. If it is connected directly to 12V (steady burn) it will over heat and void warranty.

## INSTALLATION INSTRUCTIONS


Use the L brackets (included) to mount the LED lights. Vary the height of the LED lights by positioning the longer side of the L bracket flat against the mounting surface for a lower height. Position the shorter side of the L bracket flat against the mounting surface for a higher height. After mounting in desired location connect ribbed side of wire to flasher. Then attach smooth side of wire to ground.

(Shown in diagram below.)

## FLASH PATTERNS

Double Alternating  
Quad Alternating  
Quint Alternating  
Mega Alternating

Double Simultaneous  
Quad Simultaneous  
Automatic Random Select

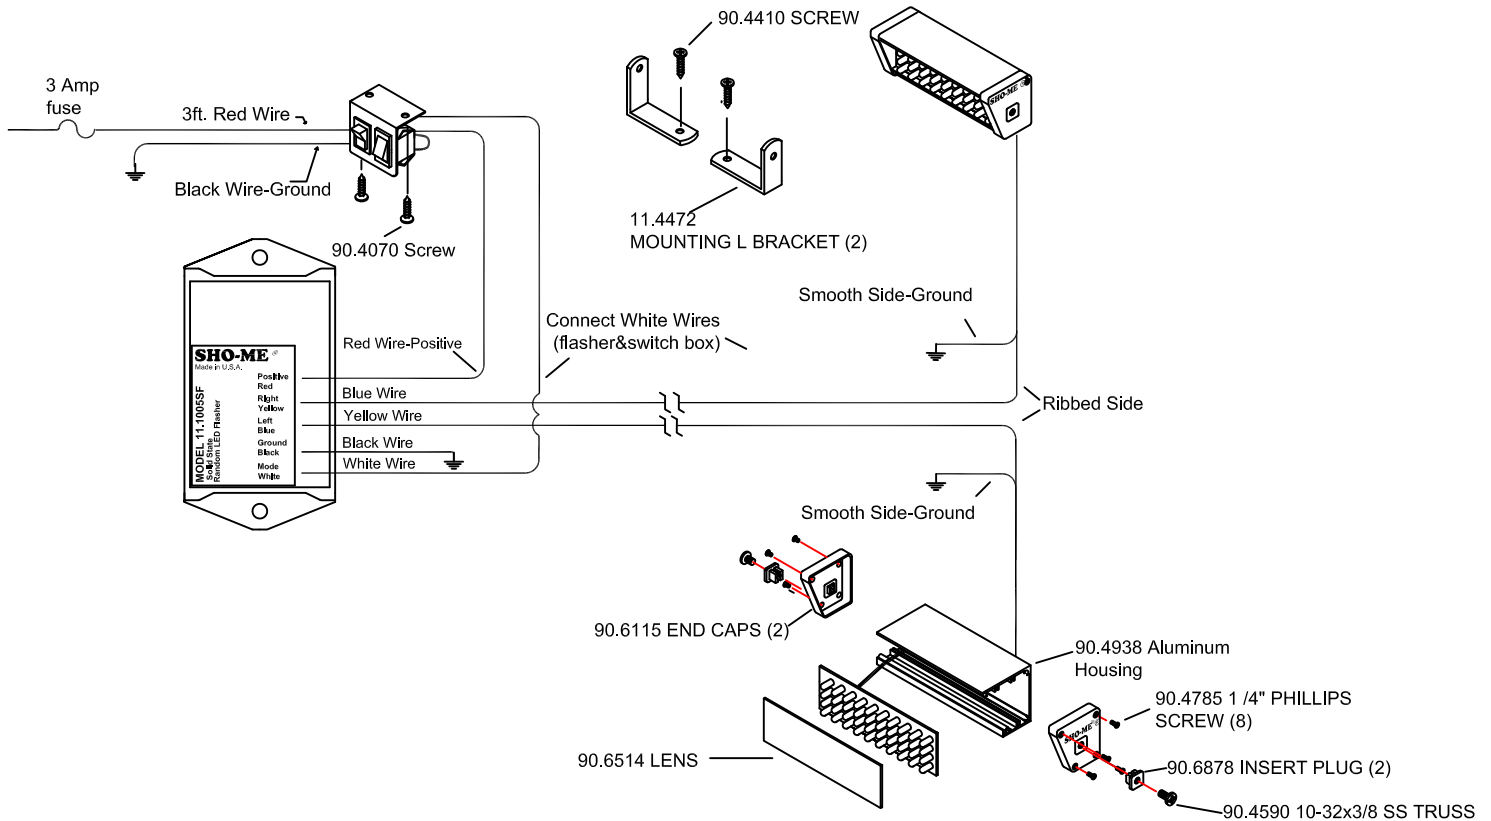

**PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625**  
**U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240**  
**E-mail: sales@able2products.com WEB: www.able2products.com**