



**MODEL NO. 11.8200GS Series
LED "By The Inch" Light
(Negative Switched)**

GENERAL INFORMATION:


NOTE: The Negative Switched LED "By The Inch" Light must be wired to a **Negative Switching Flasher**. If it is connected directly to 12V (steady burn) it will over heat and void warranty.

PRODUCT SPECIFICATIONS:

Optimum Input Voltage:	+13.8 VDC
Operating Current:	.04 amps per inch
Recommended Fuse:	3 amps

INSTALLATION INSTRUCTIONS:

Locate desired mounting location for "By The Inch" light. Keep in mind air bag deployment area. Use the "L" brackets (1-2 inch lights use double stick tape) to mount LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting to the desired height, connect to the flasher, as shown in the diagram below.

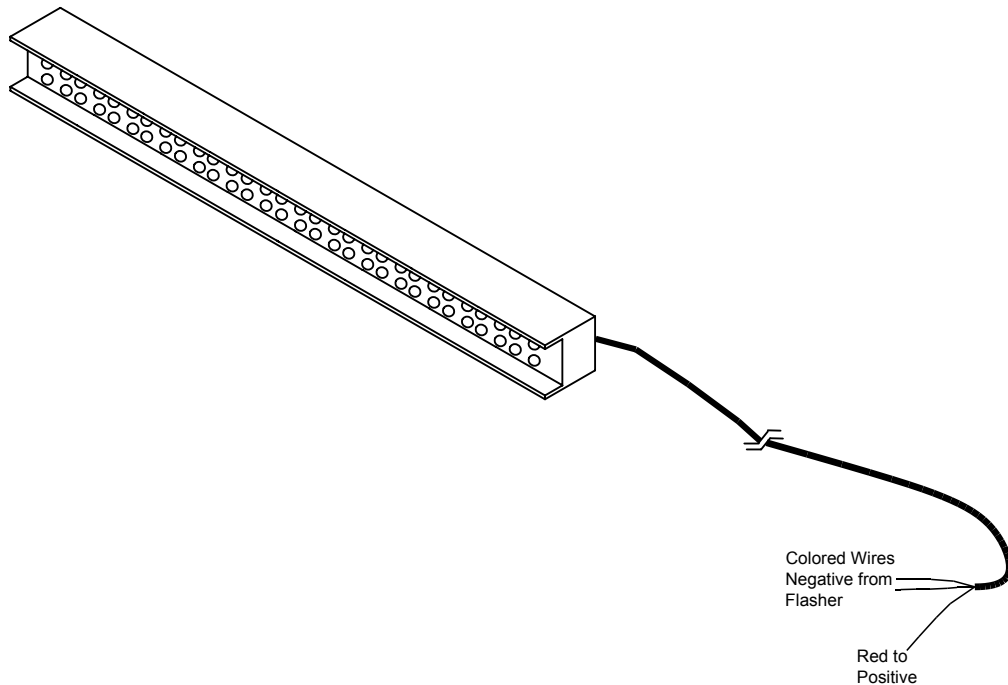

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com