

MODEL NO. 11.8300F Series LED "By The Inch" Light With Built in Flasher

GENERAL INFORMATION:

<u>NOTE:</u> The 11.8300F Series LED "By The Inch" Lights have a built in flasher with selectable flash patterns. To change the flash pattern on the *hard wire* model connect the White mode to a +12v Momentary switch, connect the Red wire to positive +12v DC and the Black wire to Ground. To change the flash pattern on the *portable* model push the momentary switch on adapter plug. Every time the momentary switch is pushed the flash pattern will change.


PRODUCT SPECIFICATIONS:

Optimum Input Voltage: +13.8 VDC
Operating Current: .04 amps per inch

Recommended Fuse: 3 amps

INSTALLATION INSTRUCTIONS:

Locate desired mounting location for "By The Inch" light. Keep in mind air bag deployment area. Use the "L" brackets to mount the LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting the light to the desired height, connect as shown in the diagram below.

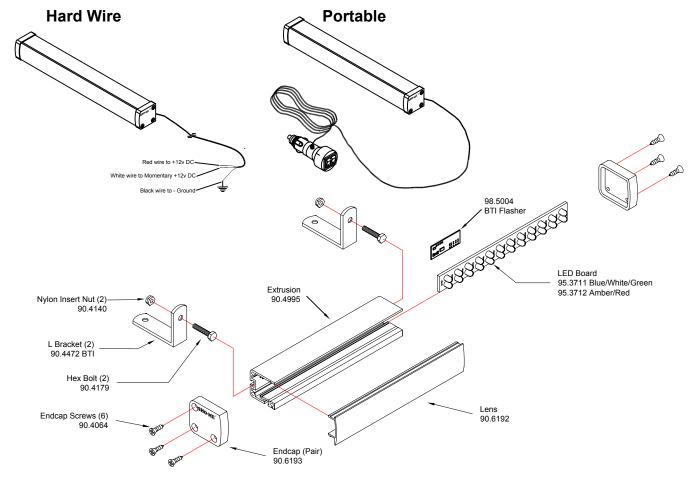



PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240

E-mail: sales@able2products.com **WEB:** www.able2products.com