



**MODEL NO. 11.8400 Series  
Bendable LED "By The Inch" Light  
with built in flasher (hardwire)**

**GENERAL INFORMATION:**

**WIRING:**


Connect the Red wire to a switched +12v positive (fuse at 3amp). Connect the Black wire to ground and connect the White wire to a momentary switched +12v positive.

**PRODUCT SPECIFICATIONS:**

Optimum Input Voltage:	+13.8 VDC
Operating Current:	.04 amps per inch
Recommended Fuse:	3 amps

**INSTALLATION INSTRUCTIONS:**

Locate desired mounting location for "By The Inch" light. Keep in mind air bag deployment area. Use the "L" brackets (1-2 inch lights use double stick tape) to mount LED Light. Vary the height of the LED Light by positioning the longer side of the "L" bracket flat against the mounting surface for lower height. Position the shorter side of the "L" bracket flat against the mounting surface for a higher height. After mounting to the desired height, wire the light according to the label on the back of the light.

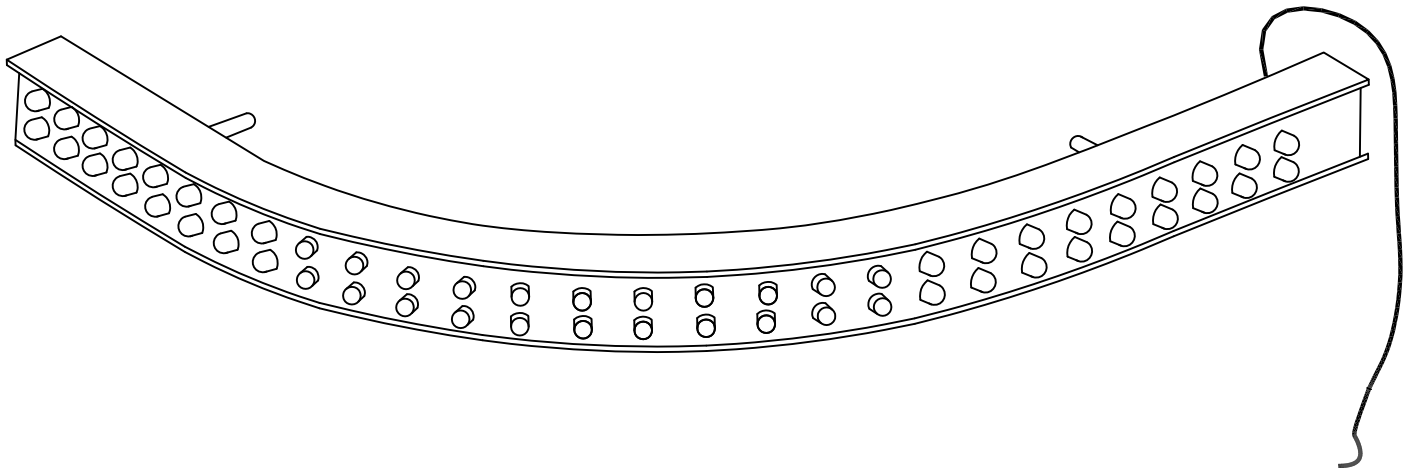

**PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625**  
**U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240**  
**E-mail: sales@able2products.com WEB: www.able2products.com**