



LIGHT STORM[®]

LED Warning Stick

MODEL NO. 12.6108


GENERAL INFORMATION

The 12.6108 Light has 39 flash patterns. To change flash pattern momentarily apply +12v to white mode wire. Each time +12v is applied, the flash pattern will change. To set Default Random flash pattern apply +12v to white wire for more than 5 seconds. The flash patterns are:

- | | | | |
|---------------------|---------------------------|---------------------------|-----------------------------|
| 1. Alt 120 1,2-3,4 | 11. Sim 600 | 21. Double-On Sim | 31. Scan Slow |
| 2. Alt 120 1,3-2,4 | 12. Sim 1200 | 22. Quad-On Alt 1,2-3,4 | 32. Scan Slow Double |
| 3. Alt 240 1,2-3,4 | 13. Double Alt 1,2-3,4 | 23. Quad-On Alt 1,3-2,4 | 33. Scan Fast |
| 4. Alt 240 1,3-2,4 | 14. Double Alt 1,3-2,4 | 24. Quad-On Sim | 34. Scan Fast Double |
| 5. Alt 600 1,2-3,4 | 15. Double Sim | 25. Fast-Slow Alt 1,2-3,4 | 35. Scan-Mega |
| 6. Alt 600 1,3-2,4 | 16. Quad Alt 1,2-3,4 | 26. Fast-Slow Alt 1,3-2,4 | 36. Random All 35 (Default) |
| 7. Alt 1200 1,2-3,4 | 17. Quad Alt 1,3-2,4 | 27. Fast-Slow Sim | 37. Random Alt 20 |
| 8. Alt 1200 1,3-2,4 | 18. Quad Sim | 28. Mega-On Alt 1,2-3,4 | 38. Random Sim 10 |
| 9. Sim 120 | 19. Double-On Alt 1,2-3,4 | 29. Mega-On Alt 1,3-2,4 | 39. Random Seq 5 |
| 10. Sim 240 | 20. Double-On Alt 1,3-2,4 | 30. Mega-On Sim | |

INSTALLATION INSTRUCTIONS

Use the L - brackets (included) to mount the light. Slide the hex bolts provided into the t-slot as shown in the Figure A below . The light can be mounted using the bottom or rear t-slots . Always mount with the bottom t-slot down, this is to allow any moisture that enters the light housing to drain properly.

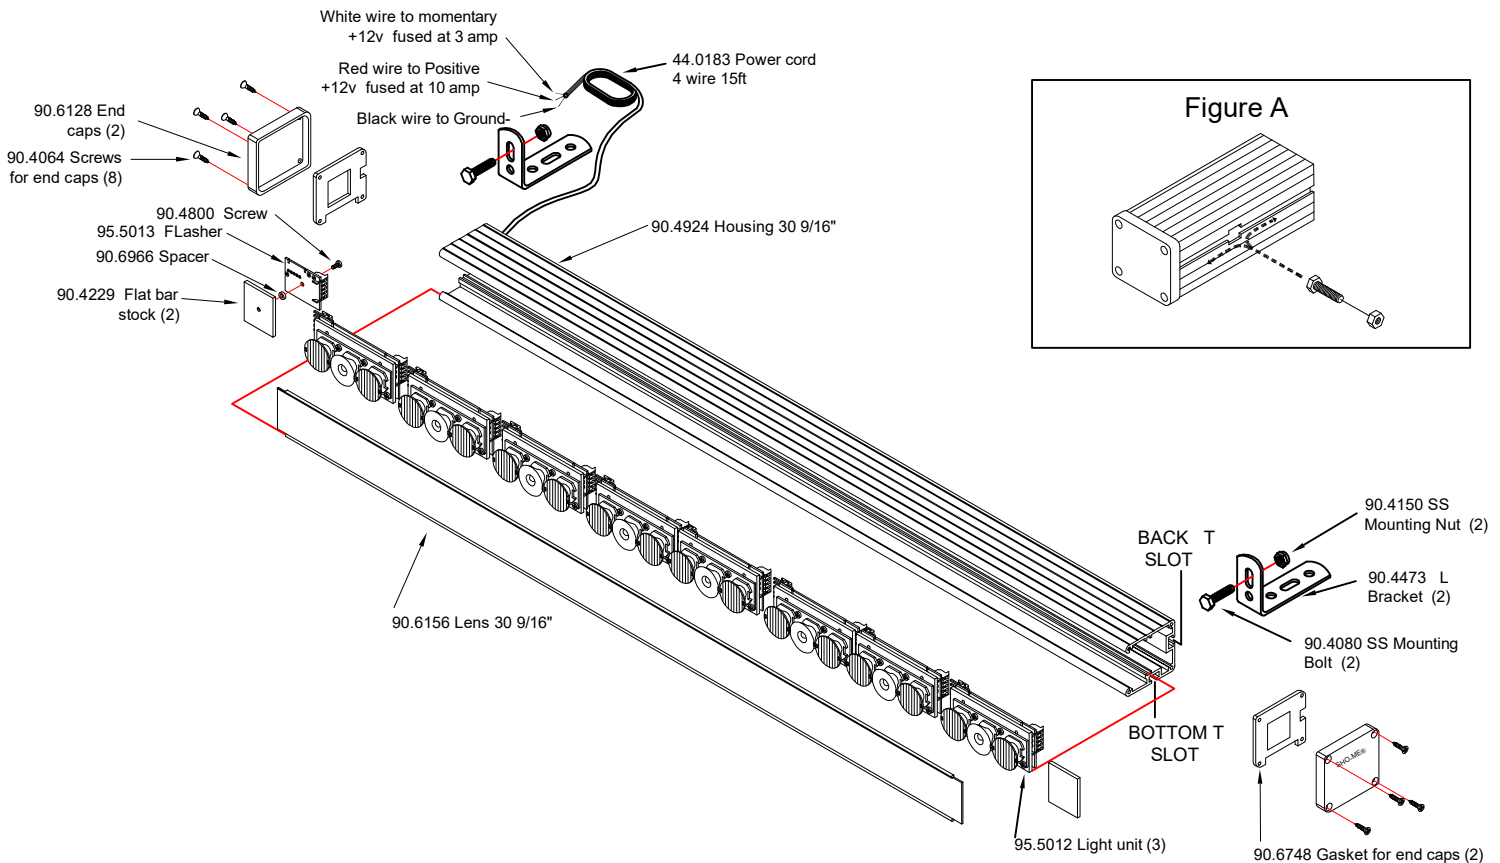

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
 U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com