



FLASHPOINT

MODEL NO. 12.6233.SF
360° LED Beacon

GENERAL INFORMATION

The 360° LED Beacon Light has 6 Luminator LEDs and a self-contained flasher with 5 flash patterns including random. To change flash pattern, momentarily apply +12v to the white wire. Each time +12v is momentarily applied to the white wire, the flash pattern will change.

FLASH PATTERNS


- 1 . Quad Flash 2 . Triple Flash 3 . Double Flash 4 . Single Flash 5 . Random

INSTALLATION INSTRUCTIONS

Choose a location to mount the LED Beacon, keeping in mind the airbag deployment area and any other obstacles. Mount the LED Beacon, connect the **Black** wire to Ground, the **Red** wire to Positive +12V. (Fuse at 3 amp) and the **White** wire to Momentary Positive +12V.


Pipe Mount

Connect to a 1" Pipe
(Not Included).

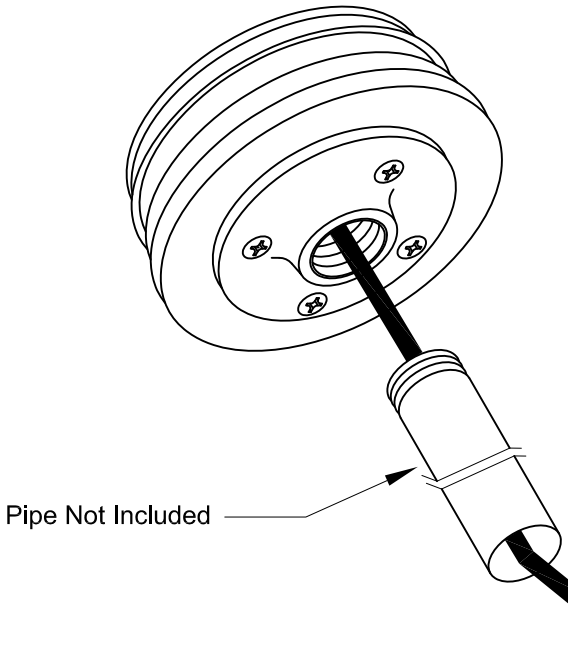

Stud Mount

Aluminum Base with a Stud Mount.

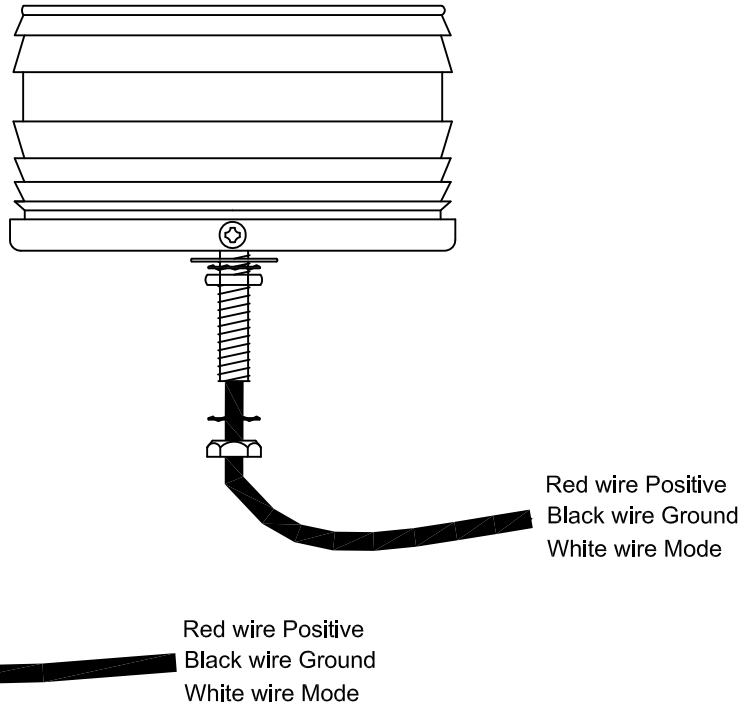

PRODUCTS COMPANY 804 East Hwy 248 Cassville, MO 65625
U.S. and Canada Toll Free Numbers Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com