



Installation Manual
MEGA LED Dash Light
Model: 10.6330.CAP / 6332.CAP

IMPORTANT WARNING: When the LED Dash Light is mounted, it must not obstruct any part of the driver's view. Make sure that after the light is installed, the operator has an unobstructed view through the windshield.

Do not install this product or route any wires in the deployment area of your airbag. Equipment mounted or located in the airbag deployment area will damage or reduce the effectiveness of the airbag, or become a projectile that could cause serious personal injury or death. Refer to your vehicle owners manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle. Able2 Products Co. assumes no liability or responsibility for determining individual applications or exact installation location criteria.

Installation Instructions:

- 1) Attach "L" Brackets with suction cups to the LED Dash Light with hardware provided.
- 2) Determine mounting location.
- 3) Apply the suction cups to the windshield.
- 4) Insert the Plug in adaptor into a 12 VDC accessory outlet.

General Information


10.6330.CAP

Voltage +12 VDC
 Amp Draw .7 amp max @+13.8 VDC
 Fuse 3 amp

10.6332.CAP

Voltage +12 VDC
 Amp Draw 1.4 amp max @+13.8 VDC
 Fuse 3 amp

10.6330.CAP
 Shown

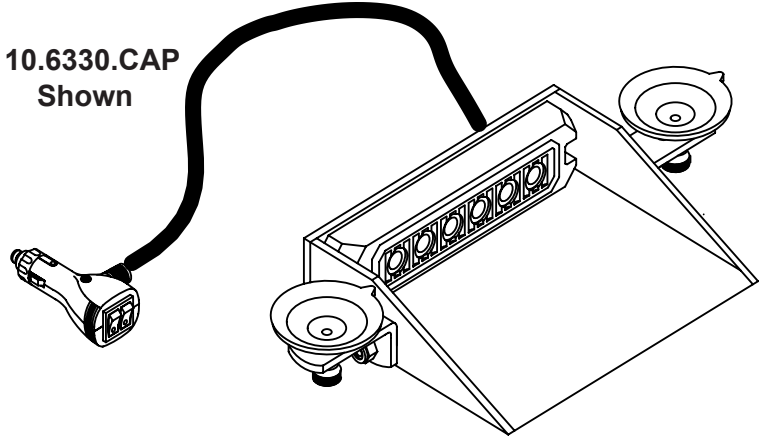

To change flash pattern, press the momentary switch (Located on the plug adaptor). Each time the momentary switch is pressed, the flash pattern will change.
 Less than 1 second for next pattern.
 About 3-5 seconds for steady burn.
 More than 5 seconds to turn off.

Flash Patterns

- | | |
|------------------------|-------------------------|
| 1. Quad Burst - Split | 12. Super Flash - Alt |
| 2. Quad Burst - All | 13. Quad/Sgl-Quad -Splt |
| 3. Quad Burst - Alt | 14. Quad/Sgl-Quad -All |
| 4. Quad - Split | 15. Accelerator - Splt |
| 5. Quad - All | 16. Accelerator - All |
| 6. Quad - Alt | 17. Express Flash |
| 7. Single - Split | 18. CA. Steady Pulse |
| 8. Single - All | 19. California Steady |
| 9. Single - Alt | 20. Steady - All |
| 10. Super Flash - Splt | 21. Cycle Flash - Splt |
| 11. Super Flash - All | |



804 E Hwy 248 Cassville, Missouri 65625
 U.S. and Canada Toll Free Numbers: Phone: 800-641-4098 FAX: 800-526-1240
 E-mail: sales@able2products.com WEB: www.able2products.com