



MODEL NO. 12.5003
Luminator LED Trio Light

General Information:

The Luminator LED Trio Light is equipped with an internal flasher. It comes from the factory in a random flash mode.

Wiring single light head:

When wiring, **Always** connect ground wire first and power wire last.

Connect the Red wire to a switched +12v. Connect the Black wire to Ground. Connect the Yellow wire to a momentary switched +12v.

***Do Not** use White wire if using only one light.*

Flash Pattern Selection:

To change flash patterns, momentarily apply +12v to the Yellow "Sync-Mode" Wire for less than 5 seconds. To reset to factory default pattern, apply +12v to the Yellow "Sync-Mode" Wire for more than 5 seconds. ***Do Not** ground **YELLOW** Wire.*

Flash Patterns

- | | |
|-------------------------|---|
| 1. 134 FPM Single Flash | 6. 536 FPM Quad-On |
| 2. 268 FPM Double Flash | 7. 401 FPM Triple Flash |
| 3. 536 FPM Quad Flash | 8. 1873 FPM Hyper Flash |
| 4. 1070 FPM Super Flash | 9. Steady (Can be used with external flasher) |
| 5. 134 FPM Single-On | 10. Random 1-8 (Default) |

Product Specifications:

Optimum Operation Voltage: +13.8 VDC
 Operating Current: .75-1.5 amps
 Recommended Fuse: 5 amp

Installation Instructions

Luminator LED Trio Light Installation

Use Point A. Drill the 2 holes on the mounting surface for the Luminator LED Trio Light using the Trio Light as a guide. Place the gasket under the Trio Light. Attach the Trio Light using (2) screws #90.4025.



PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625
U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com

Wiring Multiple Light Heads

Synchronize:


To synchronize multiple light heads, connect all yellow wires together, then touch yellow wires to +12v for more than five seconds to put them into the same pattern. All light heads will be synchronized and flash simultaneously. To alternate light heads see (Group Selection) below.

Group Selection:


The White "Group Selection" Wire will determine which lights flash at the same time, when you have 2 or more lights. For Group 1, connect White "Group Selection" wire with Red Power wire. For Group 2, DO NOT connect White "Group Selection" wire to anything. Group 1 & Group 2 will alternate. ***Do Not use White wire if using only one light.***



Gasket
Part # 90.6743



1 1/2" screw
#90.4025
(2)

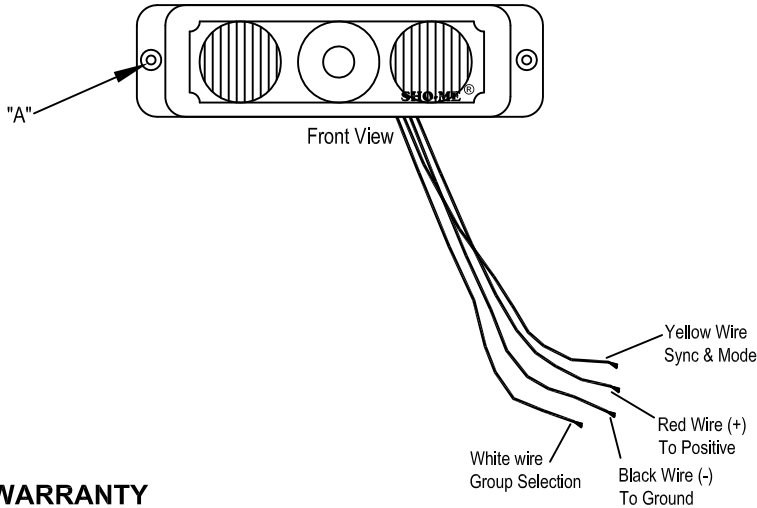

LIMITED WARRANTY

Able 2 Products Company warrants each new product (except bulbs, strobe tubes and strobe power supplies and LED lights) to be free from defects in material and workmanship for a period of two years from the date of purchase. During this warranty period, the obligation of Able 2 is limited to repairing or replacing, as Able 2 may elect, any part or parts, which after examination by Able 2 are determined to be defective, when they are delivered pre-paid. This limited warranty does not cover travel expense, the cost of specialized equipment for gaining access to the product, or labor charges for the removal and re-installation of the product.

Able 2 Products Company shall not be liable for incidental or consequential damages, including but not limited to: Loss of use of vehicle, Rental of substitute vehicle, Loss of time, Loss of work, Inconvenience, Transportation expenses, Telephone, Lodging, Loss of revenue, Loss of and /or damage to personal property for or arising out of breach of any express or implied warranty of its products.

Use of lamp or other electrical load of a wattage higher than installed or recommended by the factory, or use of inappropriate or inadequate wiring or circuit protection causes this limited warranty to become void. Able 2 Products Company will in no way be liable for any loss of profits or any indirect or consequential damages arising out of any such defect in material and workmanship whether loss is due to negligence or breach of warranty. This limited warranty does not apply to shipping damage, accident, alteration, tampering, misuse or abuse and unauthorized service.

This limited warranty is expressly in lieu of all other express or implied warranties, including the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, and of all other obligations or liabilities on the part of Able 2 Products Company. There are no warranties, unless expressed in authorized Able 2 literature, which extend beyond the description of the face hereof. No dealer, distributor, employee, or representative of the company is authorized to change this warranty in any way or to grant any other warranty.

WARRANTY PERIODS

Select LED Products	5 Years	T Model & Potted Strobe Power Supplies	2 Years
10 Series LED Products	2 Years	All Other Strobe Power Supplies	5 Years
Covert LEDs.....	2 Year	Strobe Tubes (under normal use).....	1 Year
11.8400 Series LED Lights.....	1 Years	All Other Products EXCEPT Bulbs (under normal use).....	2 Years

NOTE: Halogen and Incandescent Bulbs are not covered by warranty.

PRODUCT RETURNS

If a product must be returned, contact our factory by calling 1-800-641-4098 to obtain a Return Authorization number (RA) before you ship the product. Write the RA Number clearly on the package and return it to Able 2 Products Company, P.O. Box 543, 804 E. Hwy. 248, Cassville, MO 65625- 0543. A packing slip should be included with all shipments listing the sender's name, address, daytime phone number and description of defect. Your product will be put in first-class operating condition or replaced with a new part, and returned pre-paid.