


MODEL NO. 12.5500 Permanent Mount Lightforce II LED Mini Bar

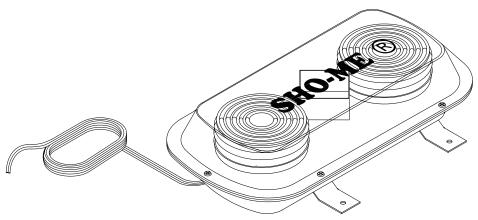

GENERAL INFORMATION:

The **SHO-ME®** Low Profile LED Mini Bar is equipped with a Solid State Flasher. The flasher has 5 flash patterns including random. A momentary switch is required to change flash pattern (not included). Each time the momentary switch is pressed, the flash pattern will change.

FLASH PATTERNS

Quad sequential Quad alternating Single sequential

Single alternating Random

WIRING INSTRUCTIONS:

Connect the Red wire to positive +12 volts switched.

Connect the White wire to positive +12 volts momentary switched.

Connect the Black wire to Ground.

INSTALLATION INSTRUCTIONS:

Determine location to mount your Low Profile LED Mini Light Bar. Do not install this product or route any wires in the deployment area of your air bag. Equipment mounted or located in the air bag deployment area will damage or reduce the effectiveness of the air bag, or become a projectile that could cause serious personal injury or death. Refer to your vehicle owners manual for the air bag deployment area. The User/Installer assumes full responsibility to determine proper mounting location, based on providing ultimate safety to all passengers inside the vehicle.

WARNING: .

If mounting this product requires drilling holes, the installer MUST be sure that no vehicle components or other vital parts could be damaged by the drilling process. Check both sides of the mounting surface before drilling begins. Also deburr any holes and remove any metal shards or remnants. Install grommets into all wire passage holes.

Use only soap and water to clean the outer lens. Use of other chemicals could result in premature lens cracking (crazing) and discoloration. Lenses in this condition have significantly reduced effectiveness. Inspect and operate this product regularly to confirm its proper operation and mounting condition. **Do not use a pressure washer to clean this product.**



PRODUCTS COMPANY • 804 East Hwy. 248 • Cassville, MO 65625
U.S. and Canada Toll Free Numbers • Phone: 800-641-4098 FAX: 800-526-1240
E-mail: sales@able2products.com WEB: www.able2products.com